


Intermittent Ink Roll Coder DK-802

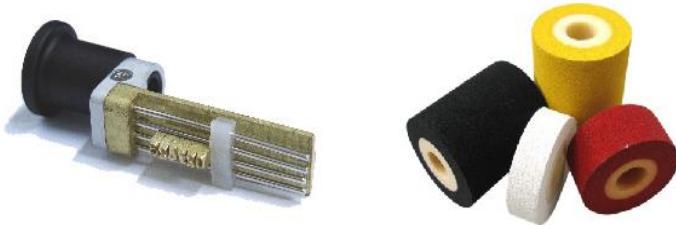

- ◆ Save the cost of consumables to the utmost.
- ◆ Compact design, no wearing parts, easy operation.
- ◆ Back-up ink roll heating system, save machine downtime.

Specifications:

Print Area	T-Type, Max 3 lines, Max 20 characters per line
Brass Types	T-Type: 3.5mm*1.5T, 2.0T, 2.5T(W)
Ink Roll Required	Φ36*32 mm, Φ36*35 mm, Φ36*40 mm
Electricity	AC220 ±10V, 50/60 Hz
Power	130W, 2A fuse
Environment Temperature	4℃- 40℃
Relative Humidity	10%-95%, non-condensing
Weight	Printer Unit 2.2kg
Overall Dimensions	205mm×162.5mm×124mm (L×W×H)

Print Sample:



- ◆ Installed to intermittent packaging machine, max print speed 120 prints/min.
- ◆ Adopt LED display and industrial-grade key panel, can adjust temperature and delay settings.
- ◆ Temperature protection, machine works only if it reaches a certain value.